

## DSS1200BM-B6C-2800

## **Controlled Rectifier**

#### **FEATURES**

- High Reliability Proven Design
- DCR3220A65
- Forced Air Cooling
- Redundant Fan
- RC Snubber
- Pressure Switch
- IR Temperature Sensor (Optional)
- DC Fuse (Optional)
- Gate Drive (Optional)
- Easily Maintainable Design

#### **APPLICATIONS**

- Power Generation
- Renewables

The Dynex Standard Assemblies range consists of proven high reliability Heatsink Assemblies for a challenging range of applications.

The DSS1200BM-B6C-2800 is a controlled bridge rectifier spread across 3 individual phase arm assemblies. The forced air-cooled design has been optimised for high reliability operation for deployment in applications that require continuous operation and long lifetime. The Thyristor characteristics have been tailored specifically to lower the overall losses of the assembly to improve reliability as well as increase efficiency.

The design can be altered to suit a specific application requirement. Contact your local representative to find out more.

#### **KEY PARAMETERS**

 $\begin{array}{ccc} I_{dc} & \text{(max)} & 1200\text{A} \\ V_{ac} & 2000\text{V} \\ P & \text{(max)} & 3200\text{kVA} \end{array}$ 

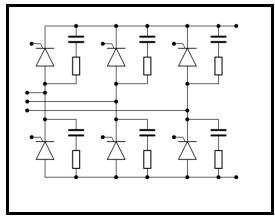


Fig. 1 Circuit configuration

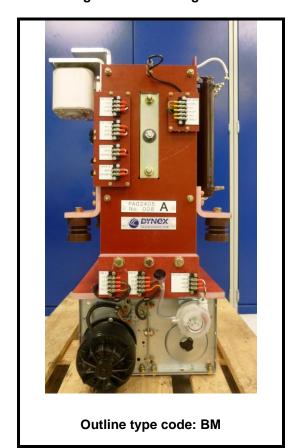


Fig. 2 Package (Image shows 1 phase arm)



# DSS1200BM-B6C-2800

## **Controlled Rectifier**

Symbol	Parameter	Min.	Тур.	Max.	Units
	Electrical Characteristics				
I <sub>dc</sub>	DC Current Continuous (50 Hz) - T <sub>Air Inlet</sub> = 40°C			1200	А
Vac			2000		V
V <sub>DC</sub>				2700	V
P <sub>Total</sub>				3200	kVA
Viso	50Hz 1min			7.5	kVac
Х	Assumed Transformer Reactance	6			%
	Mechanical/Environmental				
Weight	Per phase		125		Kg
PD	Pollution Degree (EN 50178)		2		
	Fan Noise		83		dB
IP	Ingress Protection (EN 60529)		00		
	Pressure Switch Aux Contact Current (230Vac)			0.5	Α
	Fan Data				
V <sub>Fan</sub>	Fan voltage		230		V
f <sub>Fan</sub>	Fan Frequency		50/60		Hz
P <sub>Fan</sub>	Fan Power (2 per phase)		670		W
	Snubber – per Thyristor				
R	(P <sub>Max</sub> - 1500W)		94		Ω
С			0.22		μF



### **PACKAGE DETAILS**

For further package information, please visit our website or contact Customer Services.

All dimensions in mm, unless stated otherwise.

DO NOT SCALE.

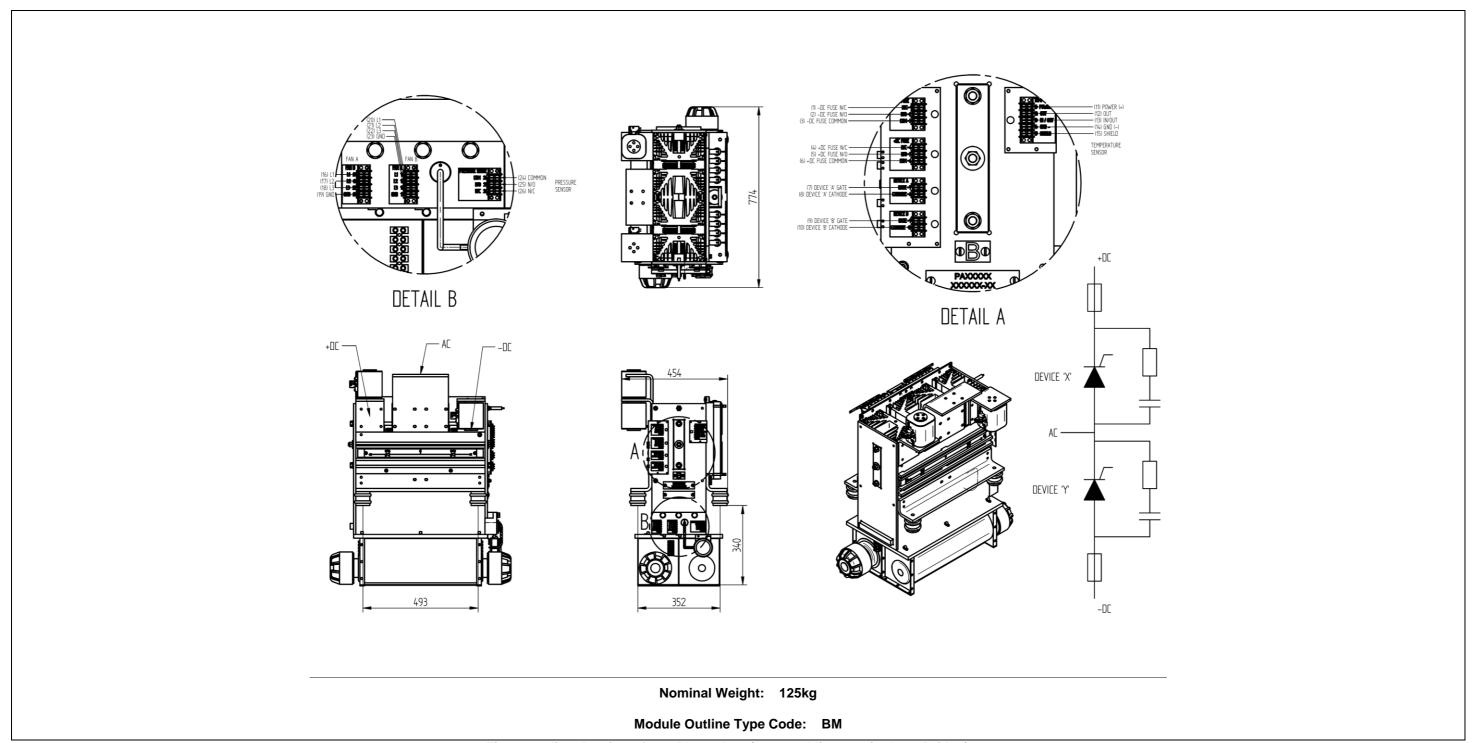


Fig. 3 Outline drawing of one Phase Arm (3 assemblies required per Bridge)