

AN6184

Effective Thermal Resistance for Repetitive Waveforms

Application Note

AN6184-1 January 2016 (LN33307)

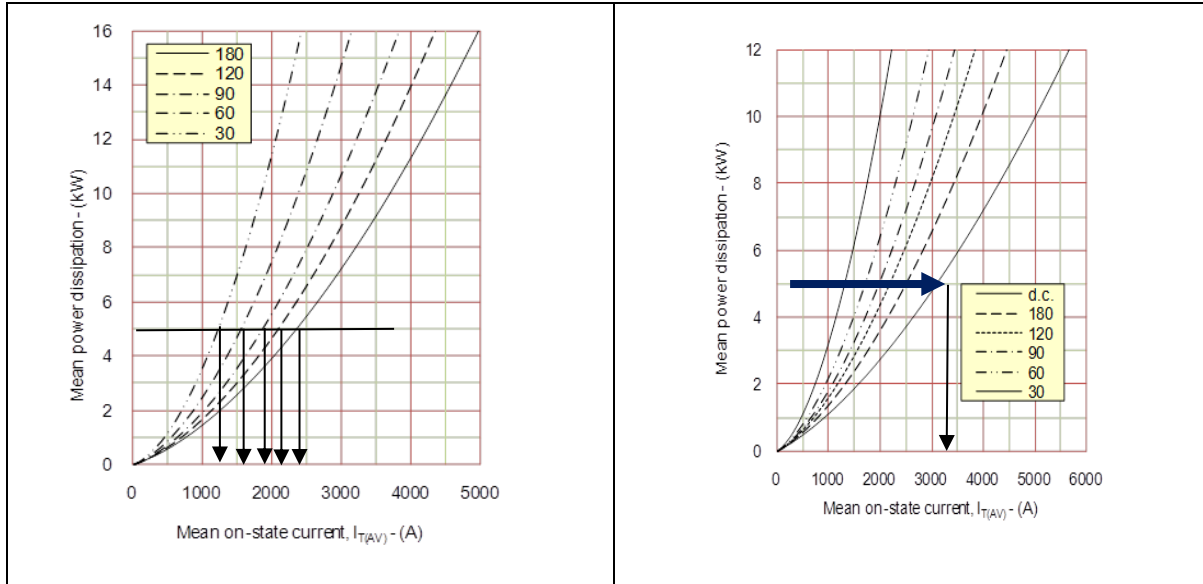


Fig.3 On-state power dissipation – sine wave

Fig.6 On-state power dissipation – rectangular wave


The above figures from a DCR3030V42 thyristor datasheet give the mean power dissipation for sine and square waves for a number of conduction angles. If we consider the square wave graph, fig 6, for d.c, we see that for a mean power of 5kW, the d.c. current is 3090A and for a case temperature of 60°C, the junction will be at $60^{\circ}\text{C} + 5\text{kW} * R_{th}(\text{dc}) = 60^{\circ}\text{C} + 5000\text{W} * 0.00746^{\circ}\text{C/W}$ or 97.3°C where $0.00746^{\circ}\text{C/W}$ is the d.c. thermal resistance given in the datasheet under THERMAL AND MECHANICAL RATINGS.

For sine waves the de-rate curves in figure 3 of the datasheet give the following values of Average or Mean current to give 5kW of conduction losses.


Conduction angle	180°	120°	90°	60°	30°	15°
Mean current for 5kW	2340	2080	1860	1550	1220	950
Peak current at the delay angle for 5kW	7.351kA	8.713kA	11.687kA	16.827kA	28.504kA	44.626kA

Note how, as the conduction angle decreases, the peak current, at the delay angle, necessary to give the mean current increases, leading to short pulses of power into the thyristor with longer time intervals between during which the thyristor will cool down.

If we look at the thermal response for the 180° case we see that the junction temperature vs time is variable with a ΔT_j of $\sim 6^\circ\text{C}$.

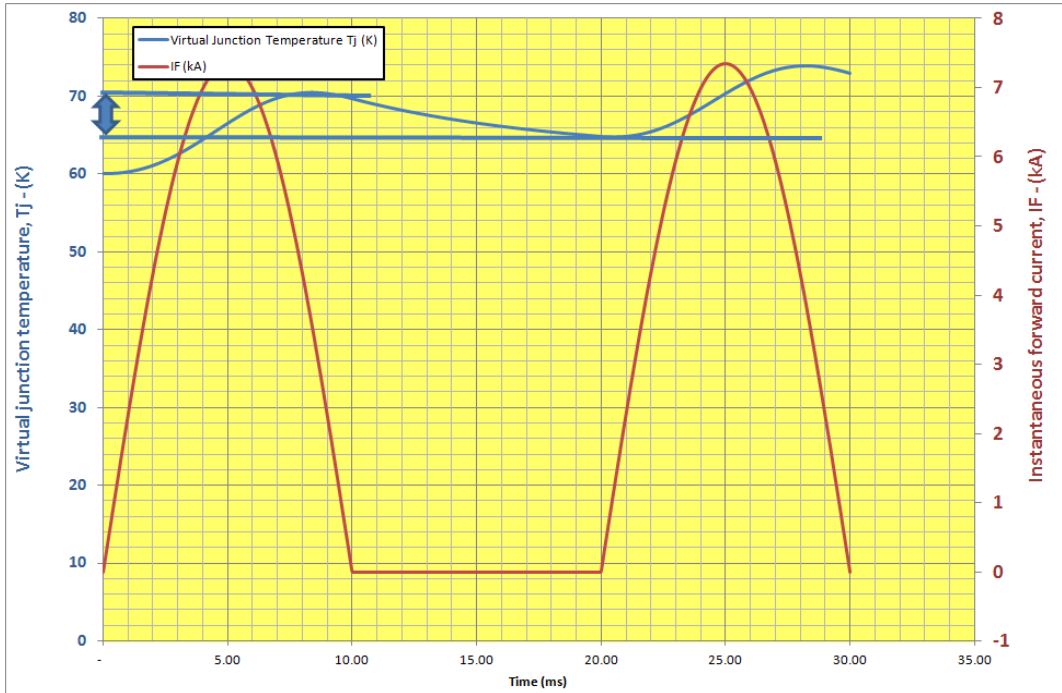


This continues to be seen when the device temperature has stabilised and the peak temperature is above the temperature that would be reached with 5kW d.c.

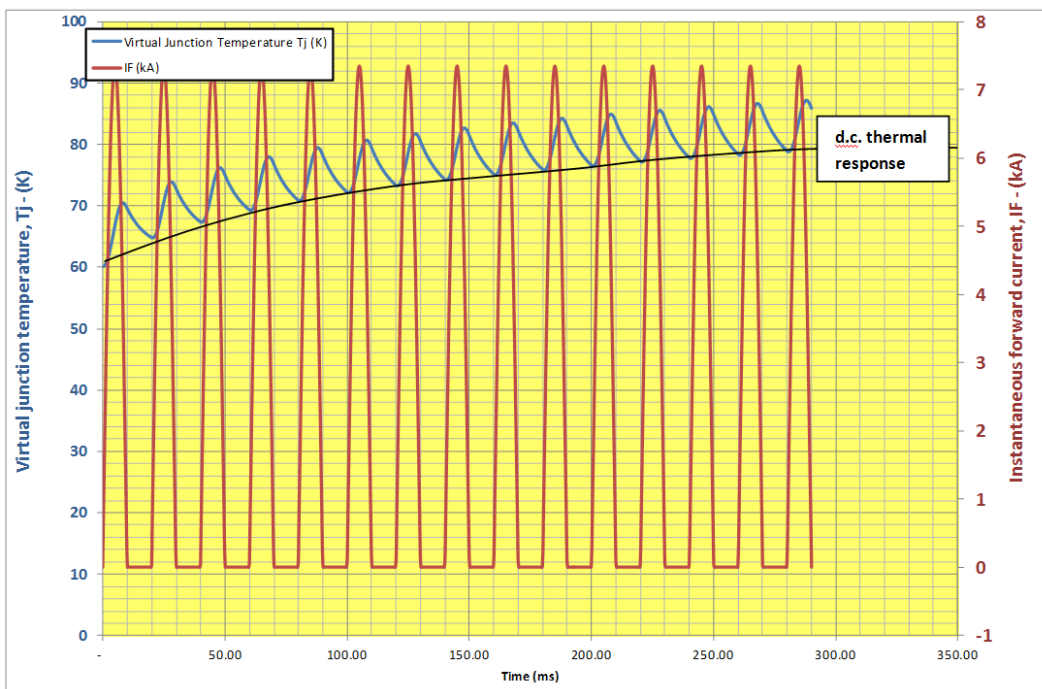

This gives rise to the concept of an Effective Thermal Resistance for repetitive waveforms.

For instance, consider a sine wave with 15° conduction angle. We now have a ΔT_{j} of ~14°C, so the Effective Thermal Resistance will be higher than for the 180° conduction angle case.

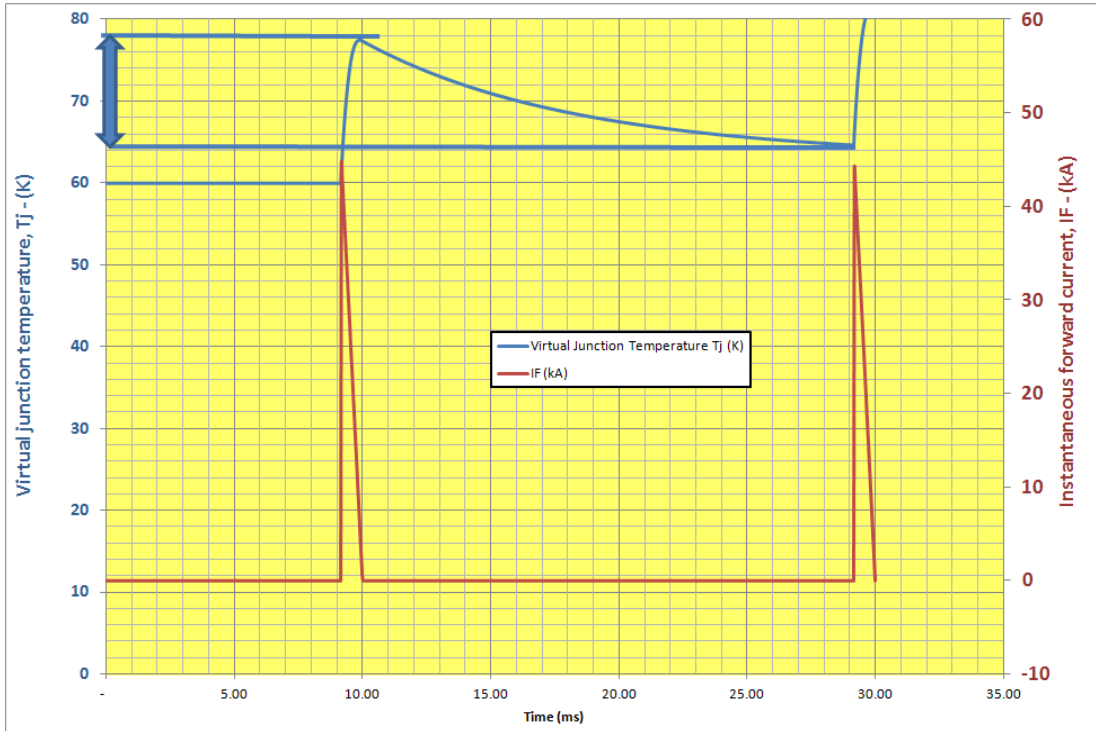

The Effective Thermal Resistance is usually presented in the data sheets in tables of actual values

Conduction	Effective thermal resistance - junction to case °C/W	
d.c.	0.00746	0.01300
Half wave	0.00880	0.01430
3 phase 120°	0.00876	0.01426
6 phase 60°	0.00927	0.01480

or increments on the d.c. value as below in the DCR3030V42 datasheet

θ°	Double side cooling	
	$\Delta Z_{th} (z)$	
	sine.	rect.
180	1.34	0.88
120	1.57	1.30
90	1.83	1.54
60	2.08	1.81
30	2.27	2.11
15	2.36	2.28

θ°	Anode Side Cooling	
	$\Delta Z_{th} (z)$	
	sine.	rect.
180	1.34	0.88
120	1.57	1.30
90	1.84	1.54
60	2.08	1.81
30	2.28	2.11
15	2.37	2.28

θ°	Cathode Sided Cooling	
	$\Delta Z_{th} (z)$	
	sine.	rect.
180	1.33	0.88
120	1.57	1.29
90	1.83	1.53
60	2.07	1.80
30	2.26	2.10
15	2.35	2.26

IMPORTANT INFORMATION:

This publication is provided for information only and not for resale.

The products and information in this publication are intended for use by appropriately trained technical personnel.

Due to the diversity of product applications, the information contained herein is provided as a general guide only and does not constitute any guarantee of suitability for use in a specific application. The user must evaluate the suitability of the product and the completeness of the product data for the application. The user is responsible for product selection and ensuring all safety and any warning requirements are met. Should additional product information be needed please contact Customer Service.

Although we have endeavoured to carefully compile the information in this publication it may contain inaccuracies or typographical errors. The information is provided without any warranty or guarantee of any kind.

This publication is an uncontrolled document and is subject to change without notice. When referring to it please ensure that it is the most up to date version and has not been superseded.

The products are not intended for use in applications where a failure or malfunction may cause loss of life, injury or damage to property. The user must ensure that appropriate safety precautions are taken to prevent or mitigate the consequences of a product failure or malfunction.

The products must not be touched when operating because there is a danger of electrocution or severe burning. Always use protective safety equipment such as appropriate shields for the product and wear safety glasses. Even when disconnected any electric charge remaining in the product must be discharged and allowed to cool before safe handling using protective gloves.

Extended exposure to conditions outside the product ratings may affect reliability leading to premature product failure. Use outside the product ratings is likely to cause permanent damage to the product. In extreme conditions, as with all semiconductors, this may include potentially hazardous rupture, a large current to flow or high voltage arcing, resulting in fire or explosion. Appropriate application design and safety precautions should always be followed to protect persons and property.

Product Status & Product Ordering:

We annotate datasheets in the top right-hand corner of the front page, to indicate product status if it is not yet fully approved for production. The annotations are as follows: -

Target Information:	This is the most tentative form of information and represents a very preliminary specification. No actual design work on the product has been started.
Preliminary Information:	The product design is complete and final characterisation for volume production is in progress. The datasheet represents the product as it is now understood but details may change.
No Annotation:	The product has been approved for production and unless otherwise notified by Dynex any product ordered will be supplied to the current version of the data sheet prevailing at the time of our order acknowledgement.

All products and materials are sold and services provided subject to Dynex's conditions of sale, which are available on request.

Any brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.

HEADQUARTERS OPERATIONS

DYNEX SEMICONDUCTOR LIMITED
Doddington Road, Lincoln, Lincolnshire, LN6 3LF
United Kingdom.
Phone: +44 (0) 1522 500500
Fax: +44 (0) 1522 500550
Web: <http://www.dynexsemi.com>

CUSTOMER SERVICE

Phone: +44 (0) 1522 502753 / 502901
Fax: +44 (0) 1522 500020
e-mail: powersolutions@dynexsemi.com